

Description


Tile levelling system consists of wedge, clips and pliers to prevent the leveling errors that may occur during installation of coating materials such as ceramic, granite, porcelain ceramic tiles, etc. and to ensure that the tiles are fixed and are at the same level until setting of adhesive mortar is completed.

Properties


- Used for levelling of wall and floor tiles.
- Suitable for use with different sizes of joint gaps.
- It is an essential element for large format and heavy tile installation works.
- Provides practical and fast solution by shortening the application time.
- Avoids mistakes which may occur during tile installation process due to deformations on substrate, helps equaling level differences and provides smooth finish.

Wedge and Clips

- Wedges ensure tiles to be at the same level by taking support from the clips. Compressing the wedges by use of pliers, the tile leveling operation is completed.
- Easy to use
- Clips may be used for joint gaps ranging from 1 mm to 3 mm. While making clip selection, the clips which is appropriate for joint gap size should be selected.


**Pliers**

- Metal pliers are developed for foreman and professionals who are capable of using Kalekim Tile Levelling System.
- Can be used for a long period of time and permanently thanks to their hardened steel.
- Used for wall and floor applications.
- Thanks to its stop pin, metal pliers provides an opportunity to compress on a stable basis. Therefore a compression is provided in the equal distance during each compression process and this also avoids involuntary ruptures of holders placed under the tiles by preventing use of redundant power.





Application



Set the pliers to the scale according to the tile thickness.

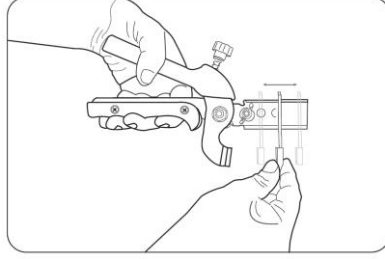


1-2) After putting tile on adhesive the clips must be placed to the sides of tile, making sure that their flat faces are placed on the base. After placing the clips, put the next tile.

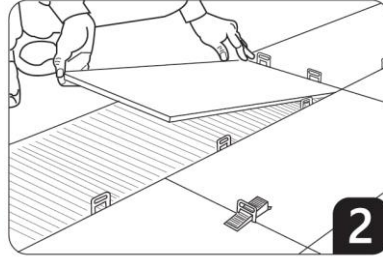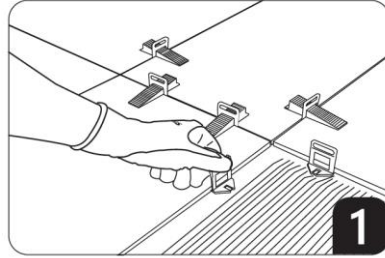


3-4) The wedges should be inserted into the clips manually. Wedges should be fixed to clips socket by compressing manually.

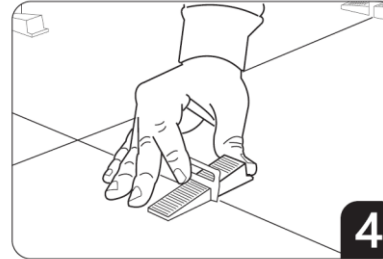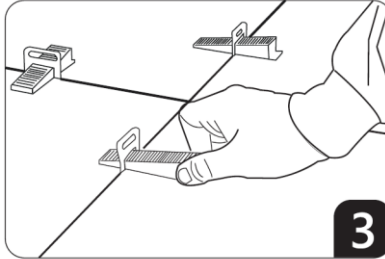


5) Levelling operation is completed after compressing the wedges with adjustable pliers.

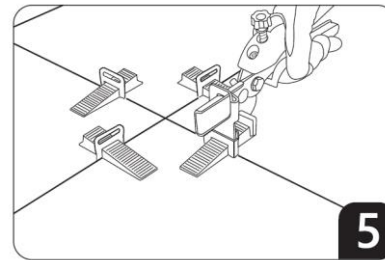


6) When the surface is finished, allow the adhesive to set for the time recommended.

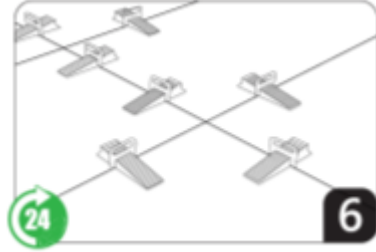


7) After the adequate time, remove the clips by hitting on them with a mallet or with your foot in the direction of the joint.

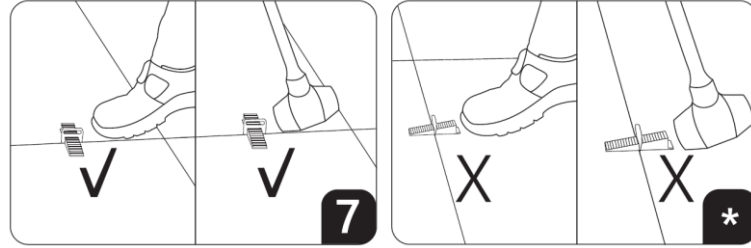

BEFORE

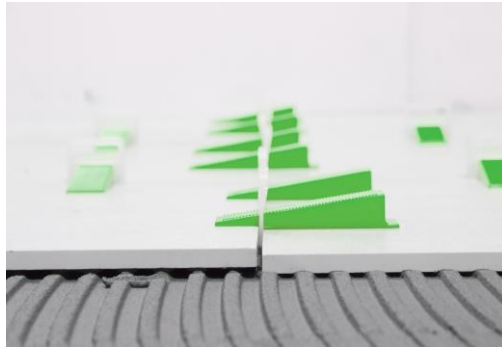


AFTER

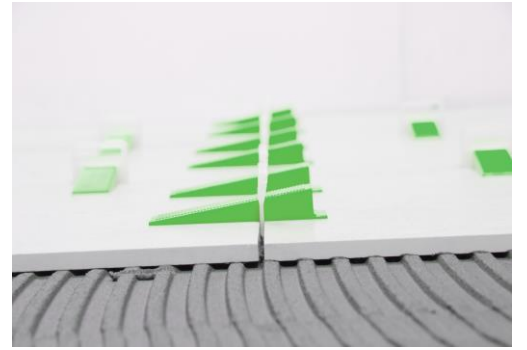

How to Calculate Tile Levelling System Pieces

Use the chart below to calculate the quantity of clips per square meter.

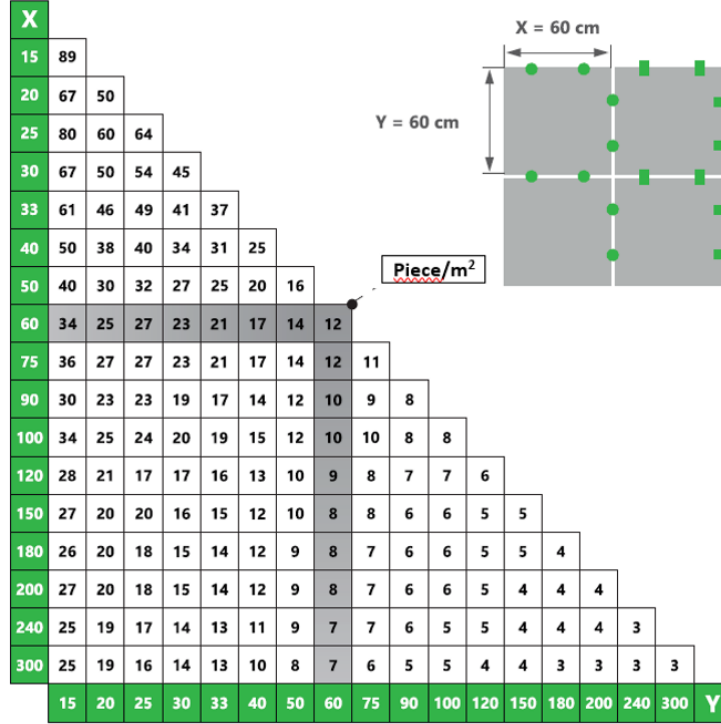

Storage

Should be stored in a dry area with an ambient temperature below 50°C. Changes in color and physical properties may be observed in products that are not stored under appropriate conditions.

Package

Wedge : 100 pieces / polyethylene bag
250 pieces / polyethylene bag

Clips: 250 pieces / polyethylene bag

Pliers : 1 piece / polyethylene bag